

Submittal Data: System 36CLX ASU36CLX & AOU36CLX



Job Name: _____ Location: _____

Purchaser: _____

Engineer: _____

Submitted To: _____ For: Reference Approval Construction

Submitted By: _____

Unit Designation: _____ Schedule No. _____ Model No.: _____

OUTLINE AND DIMENSIONS

Capacities:

| | |
|--|-------------------|
| Cooling | 33,100 BTU/h |
| Min/Max Cooling | 9,900-34,100BTU/h |
| Outdoor Design Temperature <i>F° DB/WB</i> | 95/75 |
| SEER | 15.0 |
| EER | 8.2 |
| Low Ambient Temp. <i>F°</i> | 14 |
| Voltage/Frequency/Phase | 208-230/60/1 |

Indoor Unit:

| | |
|--|-------------|
| Noise Level <i>db (A) - H/ M/ L/ Q</i> | 49/41/36/32 |
| Weight | 31 lbs. |


Outdoor Unit:

| | |
|--------------------------------------|-----------|
| Noise Level <i>db (A)</i> | 54 |
| Recommended Fuse Size | 30A |
| Min. Ampacity | 22A |
| Running Current (<i>Rated/Max</i>) | 17.7/19.0 |
| Weight | 137 lbs. |

Refrigerant Piping:

| | |
|------------------------------|---------|
| Max Ht. Difference | 98 ft. |
| Max Total or Combined Length | 164 ft. |
| Discharge Vapor Line (O.D.) | 3/8 in. |
| Suction (O.D.) | 5/8 in. |

Note: Figures are based on 230 Volts

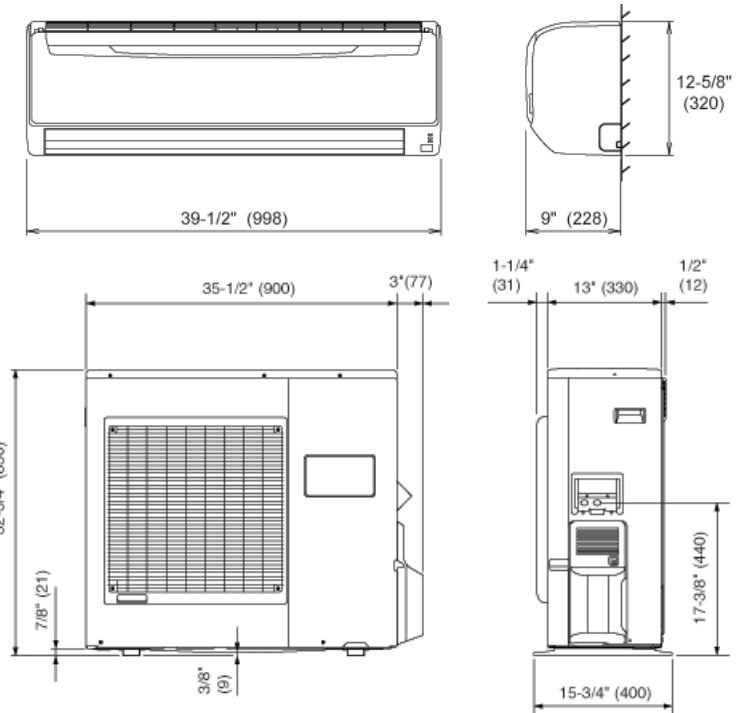

Standard Features:

- ◆ Six year compressor warranty
- ◆ Two year parts warranty
- ◆ Refrigerant R410A
- ◆ Auto Louver: 4 Way
- ◆ Auto Mode; Quiet Mode; Dry Mode
- ◆ Ion Deodorizing Filter
- ◆ Digital Wireless Remote Control
- ◆ Sleep timer; 24 hour timer
- ◆ Built in Low Ambient
- ◆ Auto Restart/ Reset
- ◆ Cold Prevention
- ◆ Power Diffuser
- ◆ Apple Catechin Filter
- ◆ Optional Wired Remote Control

Notes:
